Wall Light

INSTRUCTION MANUAL

Safety Warnings

- This product is only suitable for connection to a 240V~50Hz supply in accordance with current IEE wiring regulations. It should be installed in accordance with local building regulations and is for domestic use only. It is not suitable for a bathroom location.
- Before installing your light fitting always switch off the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation.
- This is a Class II, Double Insulated product This Fitting does not require an Earth, and Live or Neutral must not be connected to Earth. The terminal blocks are supplied according to requirements of the fitting.
- Never fit bulbs of a higher wattage than those specified on the label, as these may cause overheating and damage the fitting.
- This product contains delicate parts be careful during handling and maintenance to avoid breakage.
- If you are in any doubt about your competence please consult a qualified electrician.
- If any modification is made it will invalidate the warranty and may render the product unsafe.

Care Information

Allow 10 minutes to cool before replacing, adjusting or cleaning.

Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

Assembly/ User Instructions

Before you start

Please read these instructions carefully before fitting and retain for reference. Check the packaging and make sure that you have all the required parts. Follow each assembly step in order to prevent incorrect assembly. Ensure that the product is fully assembled as illustrated before use.

The Light pack contains:

Light fitting.

Terminal connection block(s).

Fixing pack.

The following tools may be required:

Selection of cross and flat head screwdrivers.

Electric drill and assorted drill bits.

Wire strippers.

Electrical insulation tape.


Measuring tape

These assembly diagrams are intended as a guide – if in doubt consult a qualified electrician.

- 1. Decide on the position of the light fitting, or remove existing light fitting. Take a note of the position of the electrical connections. Ensure there is a solid mounting surface, preferably a wooden joist or joist bridge to support the weight of the light fitting.
- 2. Use the product to mark the screw holes (1), ensuring you take care to ensure they are the correct distance apart.
- 3. Affix the screws to the wall (2), ensuring they stand at least 5mm away from the wall.
- 4. Support your fitting and connect the house wiring to the terminal block (3). When you are sure of the connections wrap the terminal block and overlap the wiring both sides with 2 layers of insulation tape. **NOTE: This is a Class II fitting and must NOT be earthed**.
- 5. Fit the bulb. NOTE: Never fit bulbs of a higher wattage than those specified on the label (as these may cause overheating and damage the fitting).
- 6. Secure the fitting over the screws (4) by slotting the wide section of the holes over the screws and carefully lowering into place.
- 7. Turn on the power and test.



Assembly/ User Instructions Continued

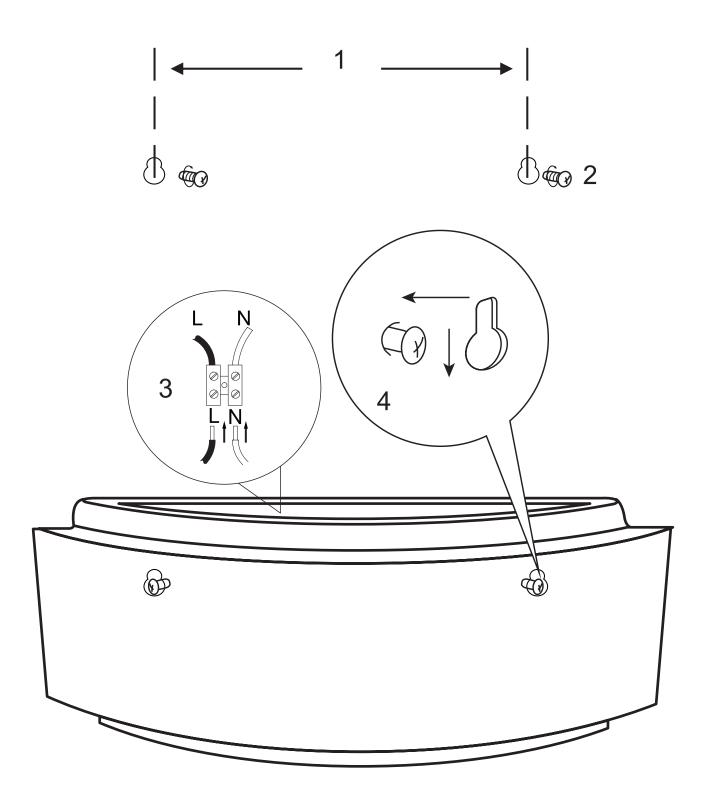



- (EN) Scan QR code for multi-language
 (FR) Scannez le code QR pour plusieurs langues
 (ES) Escanee el código QR para varios idiomas
- R Zeskanuj kod QR dla wielu języków
- Scannen Sie den QR-Code nach mehreren Sprachen
- Scansiona il codice QR per multilingua

